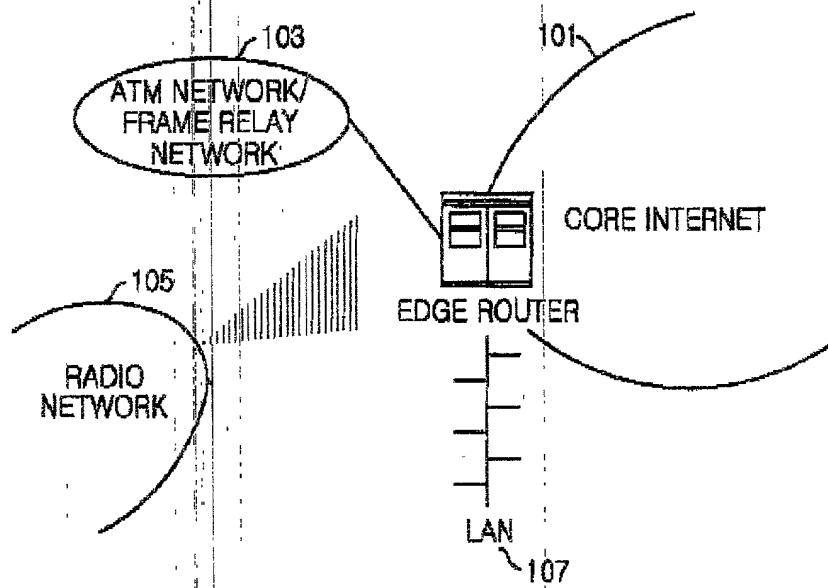


FIG. 1



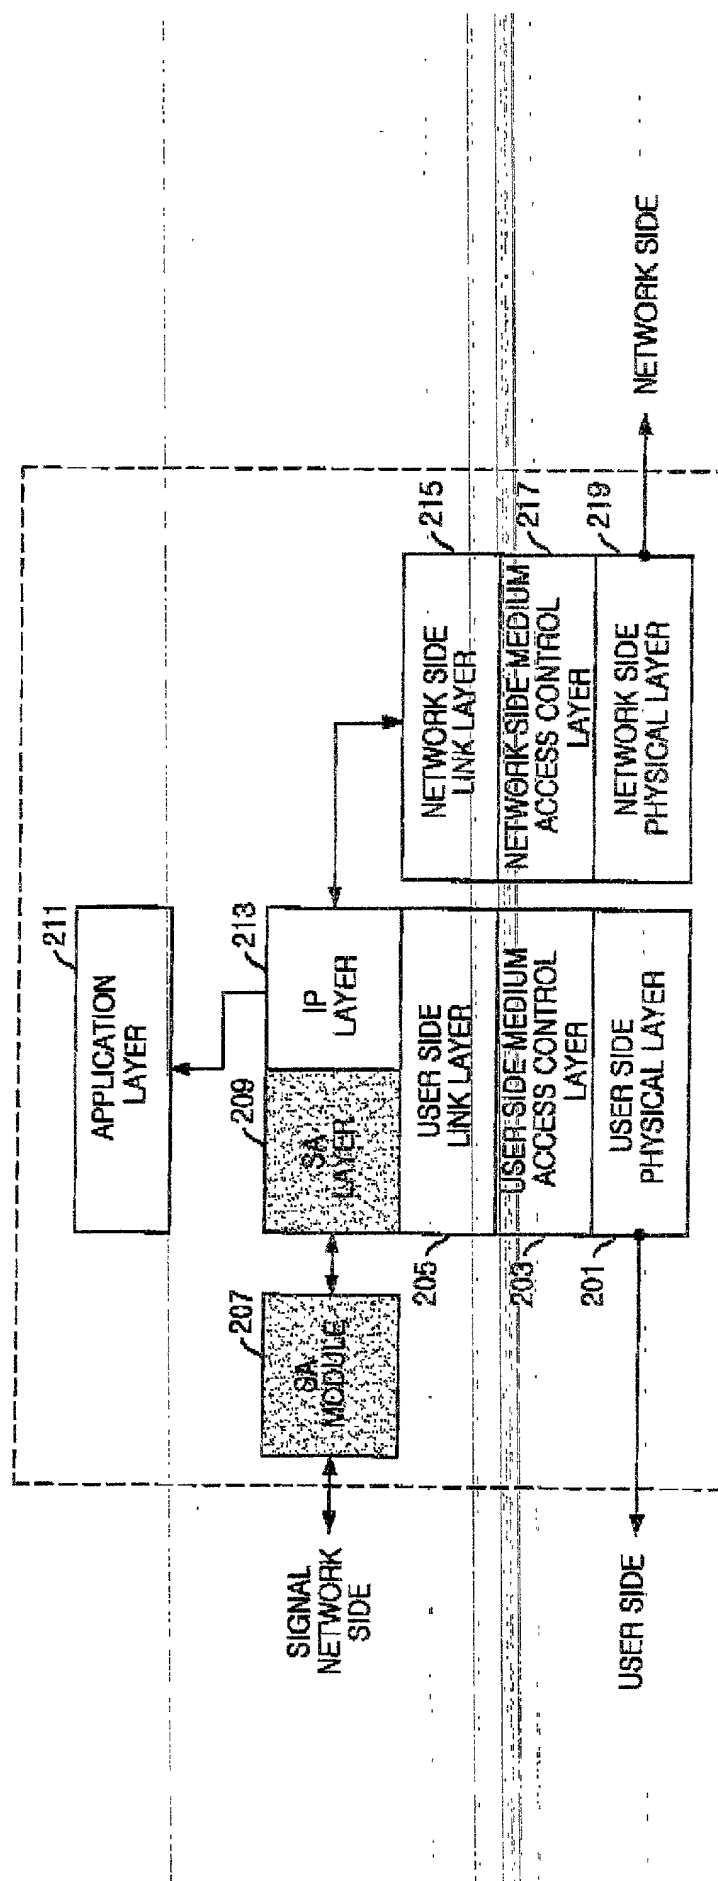


FIG. 2

FIG. 3

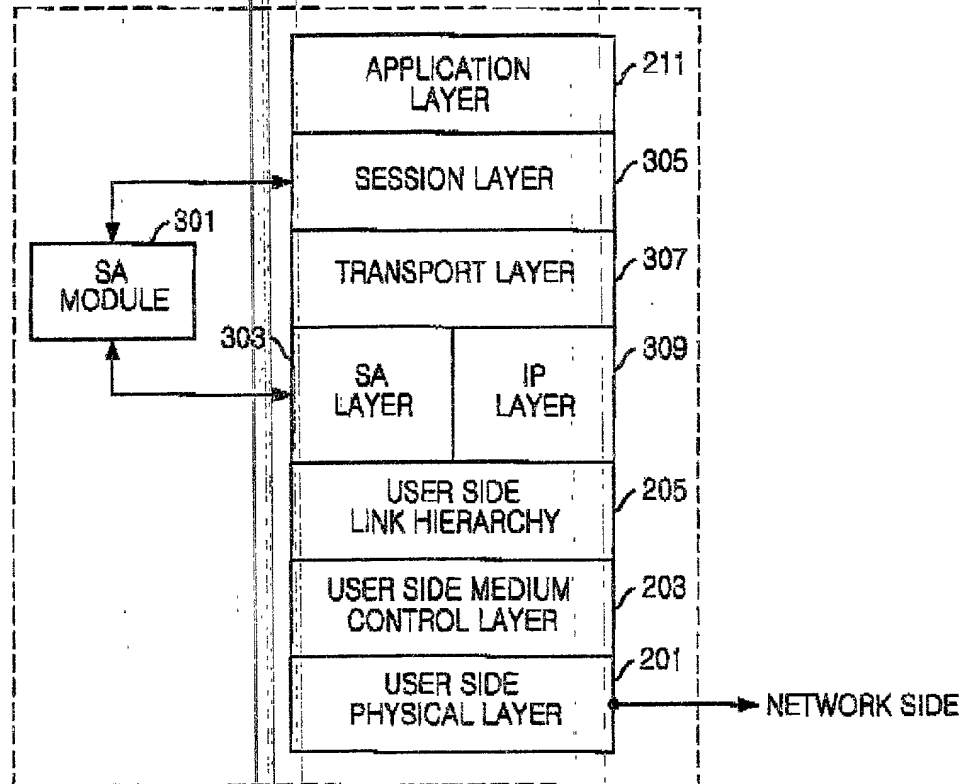


FIG. 4

0	4	8	16	31
VERSION	HEADER LENGTH	SORT OF SERVICE	DATAGRAM LENGTH	
IDENTIFICATION			FLAG	FRAGMENT OFFSET
TIME TO LIVE (TTL)		PROTOCOL	HEADER CHECKSUM	
SOURCE ADDRESS				
DESTINATION ADDRESS				
OPTION				
APPLICATION				

FIG. 5

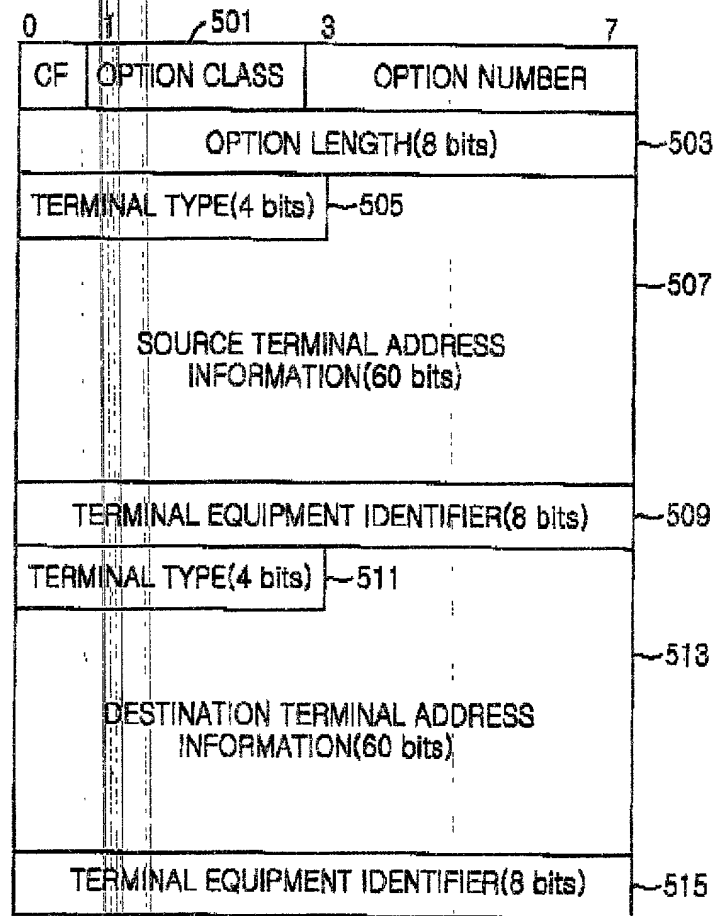


FIG. 6

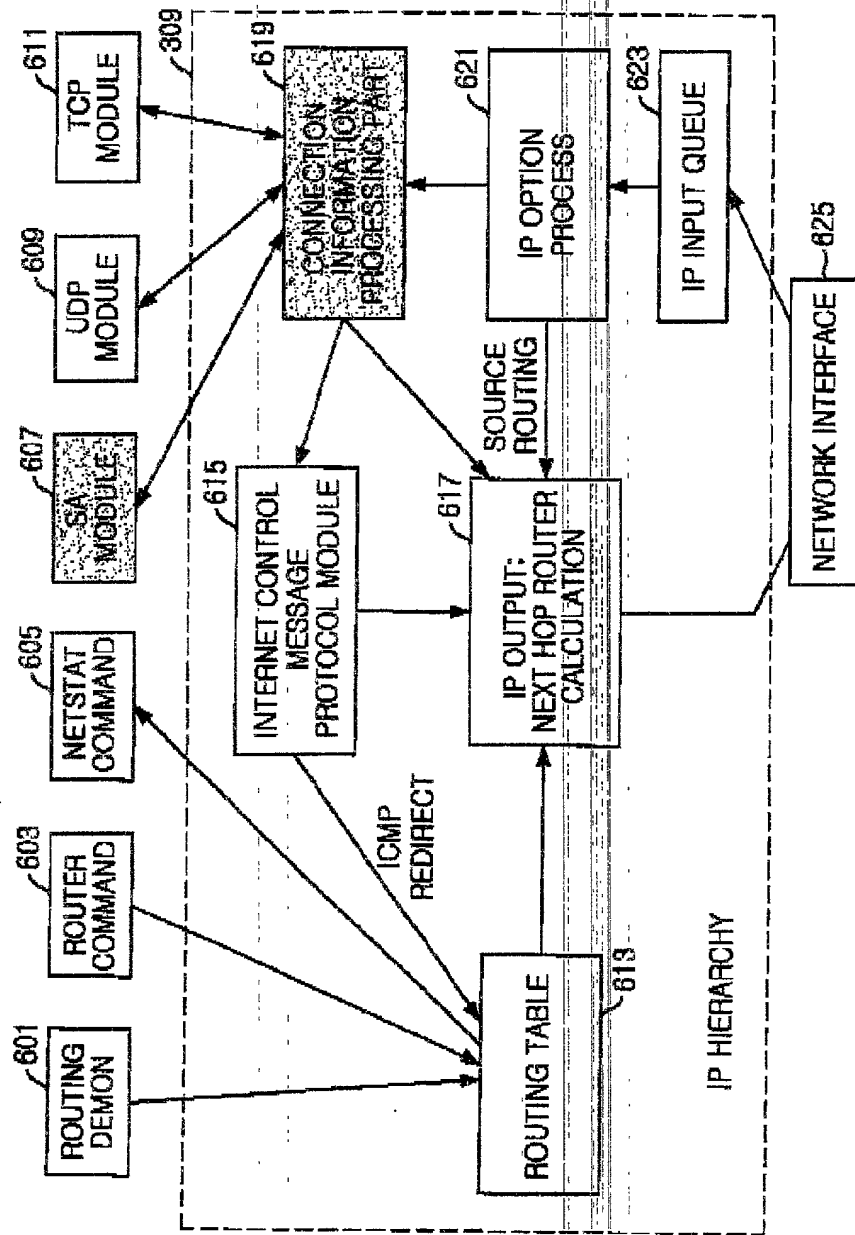


FIG. 7

E.164 ADDRESS	TEI	LINK IDENTIFIER
XXXXXXXXXXXXXXXX	XX	DLCI (IN CASE OF FRAME RELAY)
YYYYYYYYYYYYYYYY	YY	VPI/VCI (IN CASE OF ATM)

FIG. 8

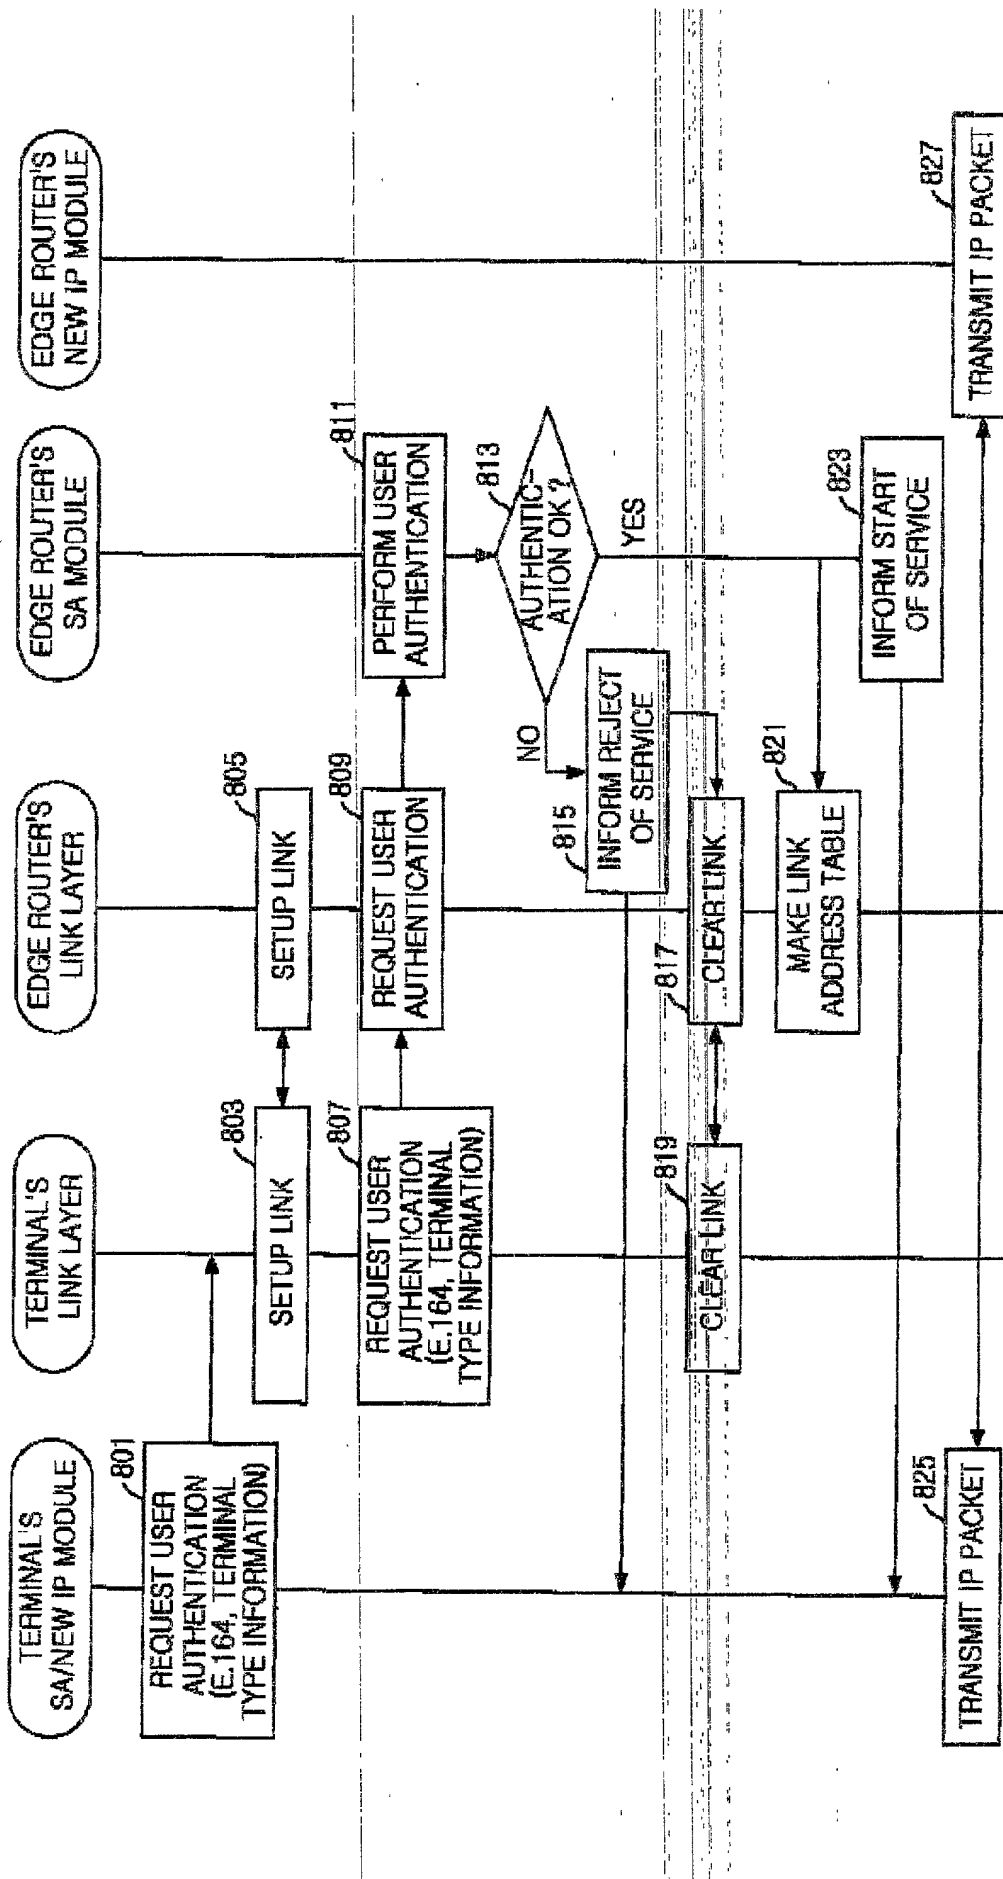


FIG. 9

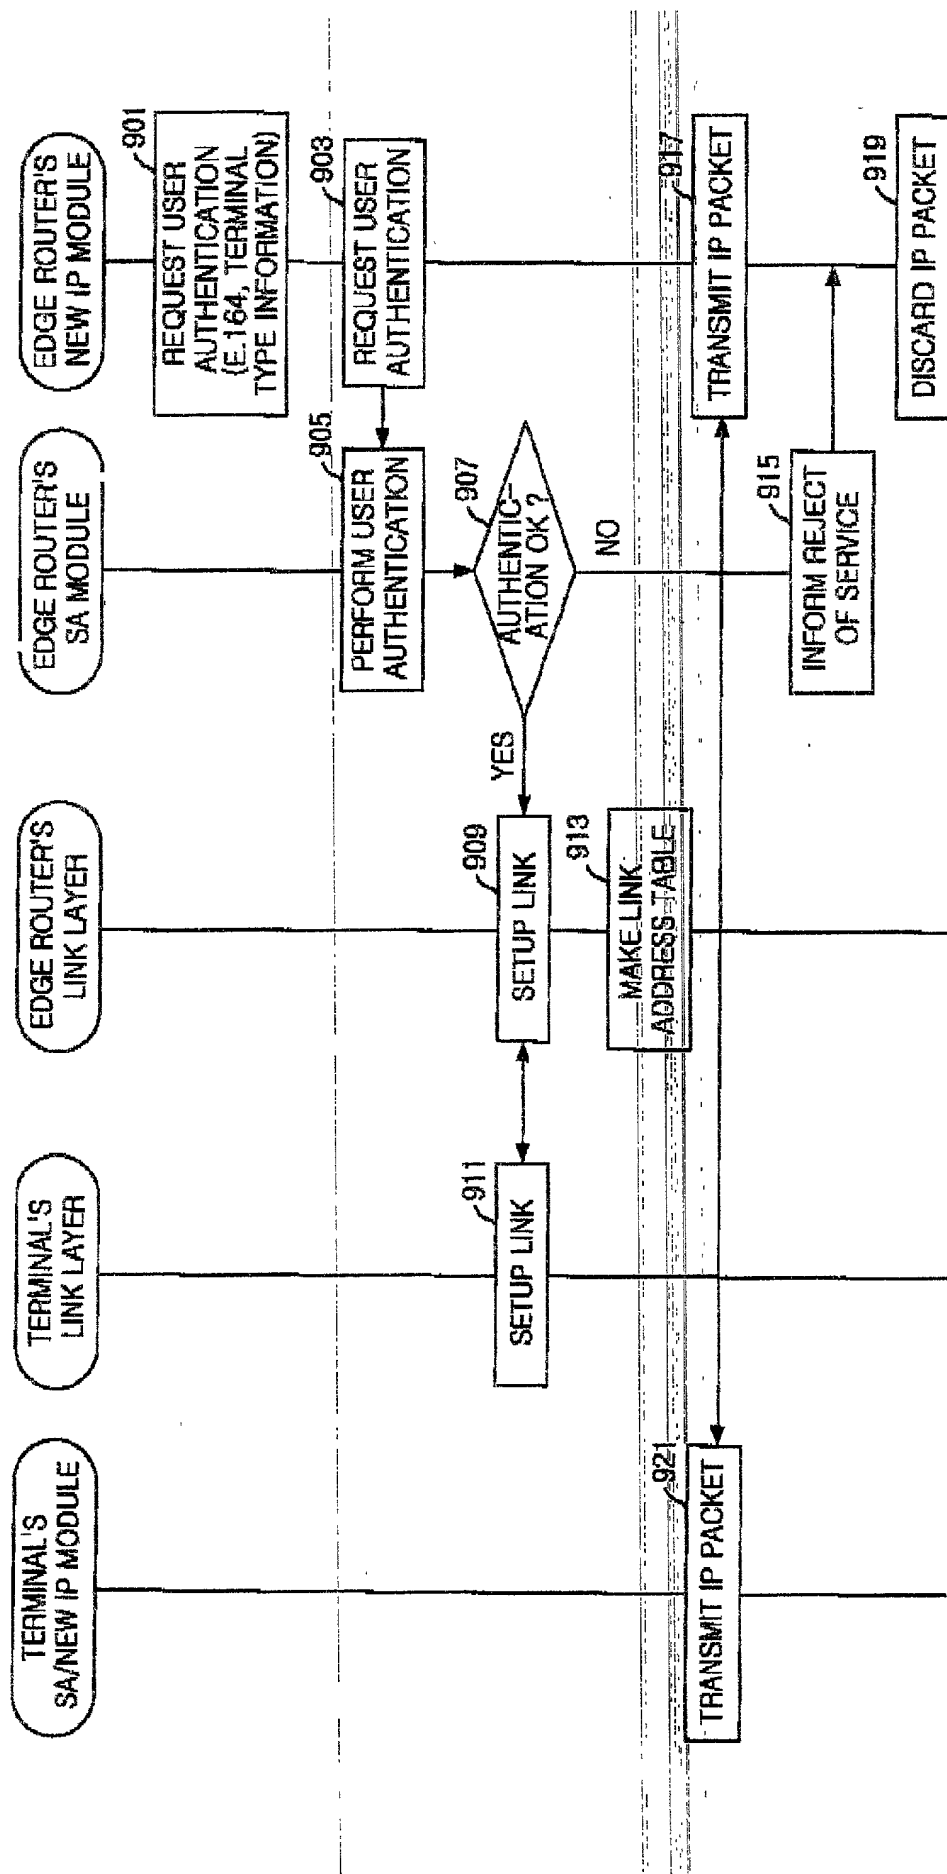


FIG. 10

